

WIDE ANGLE LEDGE OVAL TRAY RACKS MODEL 207-2410A (SINGLE) MODEL 2207-2420A (DOUBLE)

FEATURES AND BENEFITS:

- Durable oval tray rack for bussing or transporting; ideal for banquet operations.
- Extra wide extruded angles on 6-1/8" centers support various size oval trays.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.
- Two models available:
Single rack holds 10 oval trays - Model 207-2410A
Double rack holds 20 oval trays - Model 2207-2420A



207-2410A




ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop(s)
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.

207-2410A
2207-2420A

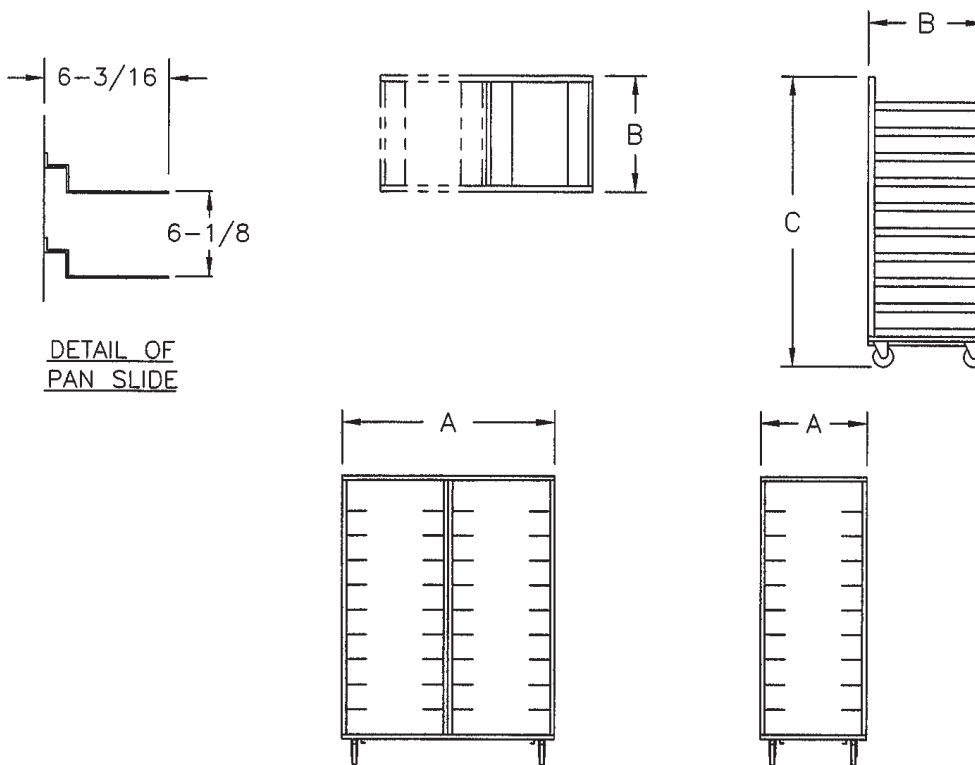

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	*WIDTH	DEPTH	HEIGHT		
207-2410A	10	SEE NOTE 1 BELOW	IN	27-5/8	30	70	23-7/16	29-1/4	61-1/2	LBS	85
			MM	705	765	1780	595	745	1565	KG	39
2207-2420A	20	SEE NOTE 1 BELOW	IN	55-1/8	30	70	23-7/16	29-1/4	61-1/2	LBS	172
			MM	1400	765	1780	595	745	1565	KG	78

- Notes: 1. For oval tray sizes: 22-3/4" x 27-5/8", 20-3/4" x 25-1/2" and 23-1/2" x 29".
 2. *Inside width dimension for each compartment.
 3. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 2-3/8 x 1-1/16 x .188; welded to posts.
- Bolsters: Formed .190 aluminum; welded to posts, casters attached.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

PAN SLIDES:

- Extruded angles, 2 x 6-3/16 x .100, riveted to posts on 6-1/8" centers.

SHORT FORM SPECIFICATIONS

Cres Cor Oval Tray Rack Model __207-24__.
 Extruded aluminum welded construction. Extruded aluminum angles on 6-1/8" centers hold (____) trays.
 Formed .190 bolsters. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. Provide the following accessories: _____. NSF listed. 2 year parts warranty.