


## **CORRUGATED SIDEWALL UTILITY RACK (WIDE OPENING) MODEL 210-1841A**

### **FEATURES AND BENEFITS:**

- Durable wide opening utility rack for transport and storage of products on 18" x 26" pans. Ideal for use where space is a premium, such as narrow aisles, walk-in refrigerators, etc.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Corrugated sidewalls securely hold 18" x 26" pans on 1-1/2" centers without tipping. Provides added strength.
- Offers complete flexibility for operator's selection of pan spacing. Eliminates potential of product damage.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

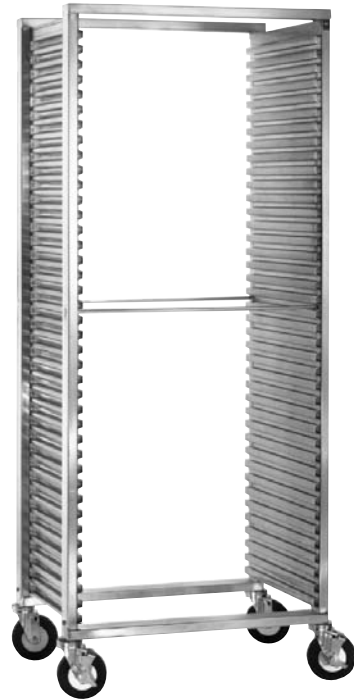


210-1841A



### **ACCESSORIES and OPTIONS (Available at extra cost):**

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page H-9 for accessory details.

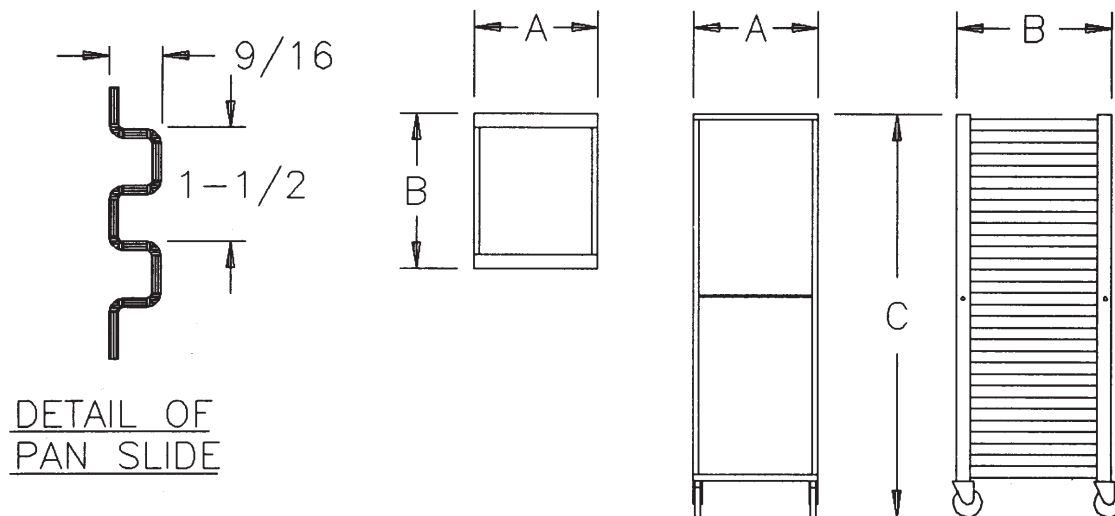

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
210-1841A	39	18 X 26	IN	29-13/16	18-3/4	69-9/16	26-1/16	18	61-3/8	LBS	60
		460 X 660	MM	760	480	1770	665	460	1560	KG	30

NOTES: 1. Send sample pan or tray with order when using any that are not 18" x 26" pans with heavy beaded edges.  
 2. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

**RACK:**

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (2): 3/8 dia. rods; welded to posts.
- Sides: .063 aluminum corrugations riveted to posts.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Two casters equipped with brakes.

**PAN SLIDES:**

- Corrugations act as pan slides on 1-1/2" centers.

**SHORT FORM SPECIFICATIONS**

Cres Cor Utility Rack Model 200- \_\_\_\_ . Extruded aluminum welded construction. Tie rods (2) applied at front and rear. No-tip corrugated sides for ( \_\_ ) 18" x 26" pans on 1-1/2" centers. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 2 year parts warranty. Provide the following accessories:  
 \_\_\_\_\_ . NSF listed.