

INSULATED HALF-SIZE TRANSPORT CABINET MODEL 309-128C (FOR 12" X 20" PANS)

FEATURES AND BENEFITS:

- Fully insulated half-size cabinet for transport of cold or hot foods.
- Internal frame in body and door for structural rigidity.
- Body constructed of non-corrosive, Hi-Tensile aluminum for strength and ease of mobility.
- Safety-conscious anti-microbial latch protects against spreading germs.
- Insulated field reversible door for flexibility. Standard with right hand hinging; left hand hinging available upon request.
- Magnetic latch for "easy open"; twist-lock catch secures door during transport. Latch and hinges mounted inboard.
- Removable wire pan supports for easy cleaning hold 12" x 20" pans on 2-3/4" centers.
- Interior pan stops on inside of door and back allow for proper air flow.
- Convenient lift handles fold flat against sides of cabinet.
- Heavy duty 5" swivel casters, two with brakes. Staggered mounting provides mobility when fully loaded especially over uneven surfaces.
- Cabinets can be stacked for flexibility; specify optional stacking kit.





309-128C



ACCESSORIES and OPTIONS (Available at extra cost):

- Key Lock Handle
- Stacking Kit
- Various Caster Options
- Corner Bumpers
- Perimeter Bumper
- Kold Keepers

See page A-20 for accessory details.

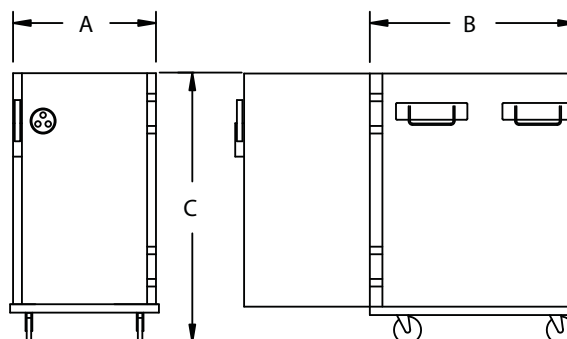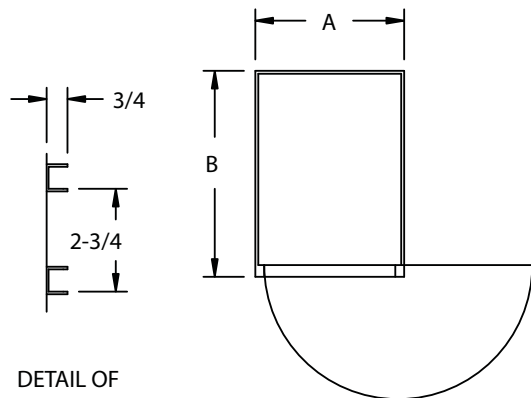

| CRES COR MODEL NO. | PAN | | | DIM "A" | DIM "B" | DIM "C" | INSIDE DIMENSIONS | | | WEIGHT ACT. | |
|--------------------|-----|-----------|----|---------|---------|---------|-------------------|--------|--------|-------------|----|
| | CAP | SIZE | | WIDTH | DEPTH | HEIGHT | WIDTH | DEPTH | HEIGHT | | |
| 309-128C | 8 | 12 x 20 | IN | 18-7/8 | 27-1/4 | 33-7/8 | 13-3/16 | 21-1/4 | 24-7/8 | LBS | 92 |
| | | 305 x 510 | MM | 480 | 695 | 860 | 335 | 540 | 635 | KG | 42 |

NOTES: 1. When ordering bumpers, add 2" to overall dimensions.
 2. When stacking two cabinets, width will increase to 24-5/8".

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

CABINET:

- Body: .063 aluminum.
- Reinforcement: Internal framework of channels, 1 x 3/4 x .125.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in walls and door; 1" in top and bottom.
- Pan stop channels: Mounted to inside rear of cabinet and door.
- Bail handles: Two mounted to each side.

BASE:

- One piece construction, .190 aluminum.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

DOOR:

- Field reversible.
- Formed .063 aluminum.
- Latch: Anti-microbial chrome plated zinc with composite handle, magnetic type; mounted inboard.
- Hinges: Heavy duty chrome plated zinc; mounted inboard.
- Gasket: Perimeter type, silicone.
- Transport latch.
- Vent: Adjustable.

PAN SLIDES:

- Flat wire racks, .104 x 5/8 nickel chrome plated steel, spaced on 2-3/4" centers.

| SHORT FORM SPECIFICATIONS |
|---|
| Cres Cor Insulated Half-Size Cabinet Model 309-128C. Inner, outer and top liners of .063 aluminum, reinforced with channels. Formed .063 aluminum door. Field reversible door. Fiberglass insulation in walls and door 1-1/2"; top and bottom 1". Welded and finished .190 aluminum base. Removable pan supports for (8) 12" x 20" pans on 2-3/4" centers. Two bail handles on each side. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each. 2 year parts warranty. Provide the following accessories: _____. NSF listed. |