JOB: _____

ITEM NO: _____

INSULATED TRANSPORT STAINLESS STEEL BANQUET CART MODEL CCB-150ST

CCB-150ST

FEATURES AND BENEFITS:

- Fully insulated banquet cart designed to hold plated covered meals.
- Use for short term food storage.
- Stainless steel construction throughout for ease of cleaning.
- Two inch thick insulation for energy efficiency.
- Supplied with six wire grid shelves spaced on 16-1/2” centers to hold (150) 11” covered meals.
- More freedom to transport hot food safely without cords, non-electrical banquet cart.
- Insulated removable top with thermometer.
- Push/pull handles on both sides; allows easy maneuvering.
- One piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty 6" modulus wheels, two swivel with brakes. Rolls easily, even over carpeted surfaces.

ACCESSORIES and OPTIONS (Available at extra cost):

- ❑ Gravity Transport Latch
- ❑ Menu Card Holder
- ❑ Kold Keepers
- ❑ Various Caster Options

See page F-4 for accessory details.

5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

CCB-150ST

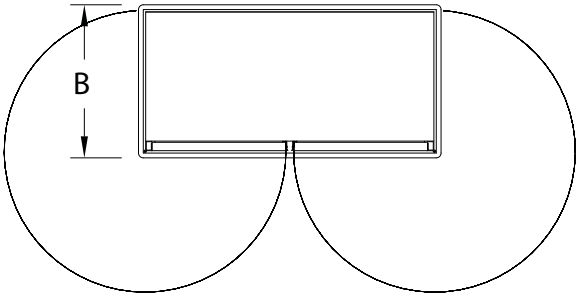

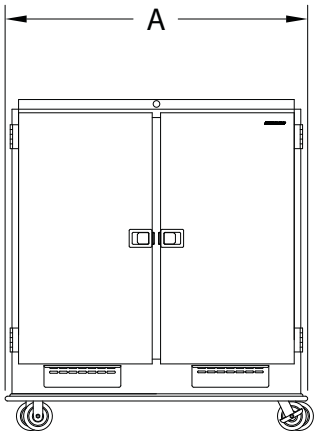

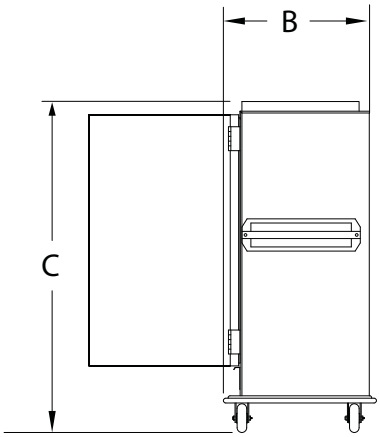

CRES COR MODEL NO.	MEAL CAPACITY COVERED PLATE DIA.			DIM "A"	DIM "B"	DIM "C"		INSIDE DIMENSIONS*				WEIGHT ACT.
	11"	12"	13"	WIDTH	DEPTH	HEIGHT		WIDTH	DEPTH	HEIGHT		
CCB-150ST	150	120	90	63-1/8	32-3/8	70-1/4	IN	55-3/4	22	50-1/2	LB	495
				1605	825	1785	MM	1420	560	1285	KG	225

*Door opening 25-15/16 X 50-1/2 (660 X 1285).
Capacity based on covered plate dia. with nesting height of 3" for plate and cover.

ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

CABINET:

- Body and top: 22 ga. non-magnetic stainless steel.
- Reinforcement: Internal framework of 14 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75˚F. 1-1/2" in back wall, base; 2" in side walls, doors.
- Air tunnels: 18 ga. stainless steel; lift-out type, mounted on back wall.
- Push handles: 1" dia. stainless steel tubing, recessed on both sides.
- Utility drawers (vented): Removable.
- Vent: Adjustable.
- Thermometer: Analog type.

BASE:

- One piece construction, .190 aluminum, welded.
- Casters: 6" dia., modulus tires, 2" wide, load cap. 450 lbs. each, temp. range -45˚/+180˚F. Zerk fittings in hub. Two rigid type. Two swivel type equipped with brakes.
- Perimeter bumper: Gray, non-marking rubber, 1 x 1.

DOORS:

- Formed 22 ga. non-magnetic stainless steel.
- Latches: Polished stainless steel, slam type; mounted inboard.
- Door gaskets: Perimeter type, silicone.
- Hinges: 11 ga. stainless steel, butt type, 270° swing.

SHELVES:

- Three shelves. Each shelf made up of 2 nickel chrome plated wire grids, 21.563 X 26.938. Six wire grids total. Shelves fixed on 16-1/2" (41.9 cm) centers. 16" clearance between shelves.

SHORT FORM SPECIFICATIONS

Cres Cor Banquet Cart Model CCB-150ST. Removable 20 ga. non-magnetic stainless steel top. Cabinet 22 ga. stainless steel, stainless steel internal frame. Fiberglass insulation in doors and sides 2", back and base 1-1/2". Doors swing 270°. Recessed side push handles. Three shelf positions consisting of six nickel chrome plated wire grids. Capacity 150 covered meals. Removable utility drawers. Base one piece .190 aluminum, welded and finished, perimeter bumper. 6" modulus casters with zerk fittings. Load capacity 450 lbs. each. 2 year parts warranty. Provide the following accessories: ____ ____ ____ .

CRES COR®
5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

© Crescent Metal Products, Inc. 2010 All rights reserved.

Litho in U.S.A.