

## INSULATED HEATED STAINLESS STEEL BANQUET CART MODEL CCB-150

### FEATURES AND BENEFITS:

- Fully insulated banquet cart designed to hold plated covered meals.
- Self contained power top lifts off for easy cleaning.
- Easy-to-read eye level controls.
- Standard 1650 Watts, 120 Volts, 15 Amps. Provides quick heat up to 200°F (93°C).
- Utility drawers hold two 7-ounce size cans of fuel. Provides heat to 200°F (93°C).
- Use for short term cold food storage. Factory installed slides hold 2 accessory Kold Keepers.
- Stainless steel construction throughout for ease of cleaning.
- Two inch thick insulation for energy efficiency.
- Supplied with six wire grid shelves spaced on 16-1/2" centers to hold (150) 11" covered meals.
- Push/pull handles on both sides; allows easy maneuvering.
- One piece welded base with perimeter bumper provides solid foundation to support heavy loads.
- Heavy duty 6" modulus wheels, two swivel with brakes. Rolls easily, even over carpeted surfaces.



CCB-150

SANITATION  
NSF/ANSI 4

c US




ENERGY STAR

### ACCESSORIES and OPTIONS (Available at extra cost):

- Gravity Transport Latch
- Menu Card Holder
- Thermometer Cover
- Kold Keepers
- Various Caster Options
- Digital Thermometer
- 240 Volt Service

See page F-4 for accessory details.

# CCB-150ST

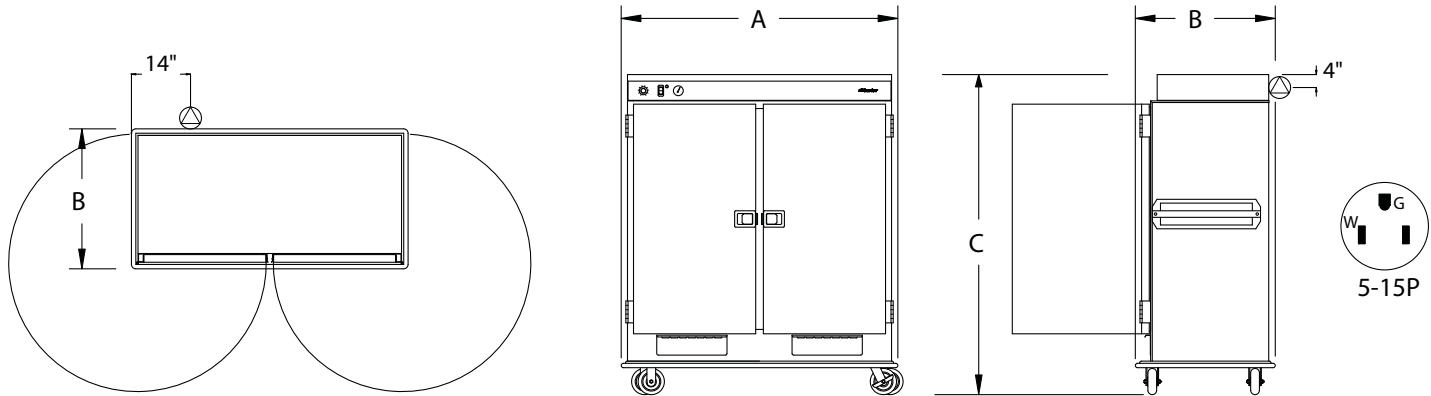

CRES COR MODEL NO.	MEAL CAPACITY COVERED PLATE DIA.			DIM "A"	DIM "B"	DIM "C"		INSIDE DIMENSIONS*			WEIGHT ACT.	
	11"	12"	13"	WIDTH	DEPTH	HEIGHT		WIDTH	DEPTH	HEIGHT		
CCB-150	150	120	90	63-1/8	32-3/8	73-3/16	IN	55-3/4	22	50-1/2	LB	573
				1605	825	1860	MM	1420	560	1285	KG	260

\*Door opening 25-15/16 X 50-1/2 (660 X 1285).

Capacity based on covered plate dia. with nesting height of 3" for plate and cover.

ALL CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

## CABINET:

- Body: 22 ga. non-magnetic stainless steel.
- Reinforcement: Internal framework of 14 ga. stainless steel.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 at 75°F. 1-1/2" in back wall, base; 2" in side walls, doors.
- Air tunnels: 18 ga. 300 series stainless steel; lift-out type, mounted on back wall.
- Push handles: 1" dia. stainless steel tubing, recessed on both sides.
- Utility drawers: Removable, holds (2) 7 oz. cans of fuel.
- Vent: Adjustable.

## BASE:

- One piece construction, .190 aluminum, welded.
- Casters: 6" dia., modulus tires, 2" wide, load cap. 450 lbs. each, temp. range -45°/+180°F. Zerk fittings in hub. Two rigid type. Two swivel type equipped with brakes.
- Perimeter bumper: Gray, non-marking rubber, 1 x 1.

## DOORS:

- Formed 22 ga. non-magnetic stainless steel.
- Latches: Polished stainless steel, slam type; mounted inboard.
- Door gaskets: Perimeter type, silicone.
- Hinges: 11 ga. stainless steel, butt type, 270° swing.

## SHELVES:

- Three shelves. Each shelf made up of 2 nickel chrome plated wire grids, 21.563 X 26.938. Six wire grids total. Shelves fixed on 16-1/2" (41.9 cm) centers. 16" clearance between shelves.

## HOT UNIT COMPONENTS:

- Removable without tools.
- Body: Formed 20 ga. non-magnetic stainless steel with black control panel.
- Thermostat: Electro-mechanical, ambient to 200°F. (93°C.).
- Thermometer: Analog type.
- Switch: ON-OFF rocker type.
- Pilot light.
- Power cord: Permanent, 10 ft., 14/3 ga. with molded plug.
- Heater (2): 750 Watt each.
- Blower motors (2).
- Slides for Kold Keeper (2 cap.).
- Metal strain relief.

## POWER REQUIREMENTS:

- 1650 Watts, 120 Volts, 60 Hz., single phase, 13.8 Amps., 15 Amp. service.

## SHORT FORM SPECIFICATIONS

Cres Cor Heated Banquet Cart Model CCB-150. Removable 20 ga. non-magnetic stainless steel top mounted power unit, 1650 Watts, 120 Volts, 60 Hz, single phase, 15 Amp service. Cabinet 22 ga. 304 stainless steel, stainless steel internal frame. Fiberglass insulation in doors and sides 2", back and base 1-1/2". Doors swing 270°. Recessed side push handles. Three shelf positions consisting of six nickel chrome plated wire grids. Capacity 150 covered meals. Removable utility drawers. Base one piece .190 aluminum, welded and finished, perimeter bumper. Six inch modulus casters with zerk fittings. Load capacity 450 lbs. each. 2 year parts warranty. Provide the following accessories: \_\_\_\_\_ CSA-US, CSA-C, CSA to NSF4 listed. ENERGY STAR Qualified.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2010 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Litho in U.S.A.