


EXTRUDED SIDEWALL UTILITY RACK MODEL 252-1840

FEATURES AND BENEFITS:

- Durable utility rack for transport and storage of products on 18" x 26" pans and plastic food boxes.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Easy to clean; interlocking, extruded sidewalls hold pans on 1-1/2" centers. Provides added strength.
- Offers complete flexibility for operator's selection of pan spacing. Eliminates potential of product damage.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

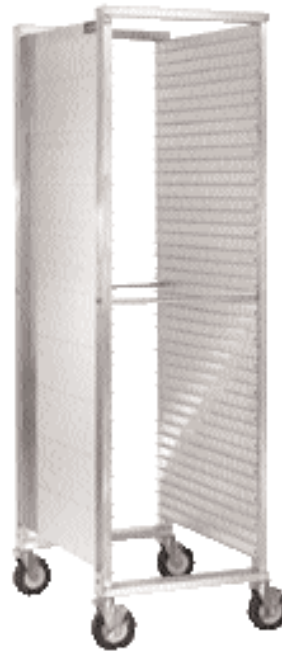


252-1840



ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.

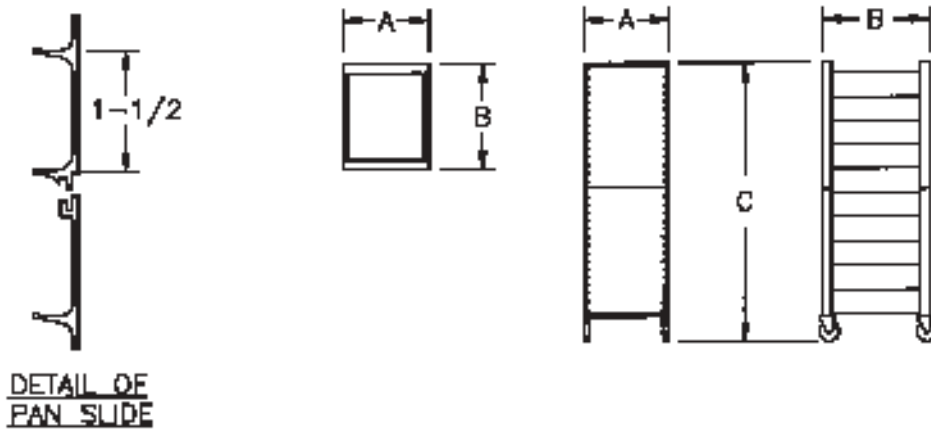

CRES-COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
252-1840	39	18 x 26	IN	21-15/16	26-5/8	69-11/16	18-1/8	25-1/2	61-1/2	LBS	70
		45.7 x 66.0	CM	55.7	67.6	176.7	46.0	64.8	156.2	KG	32

When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (2): 5/16 dia. steel rods enclosed in aluminum tubing; fastened to posts.
- Sides: Interlocking extruded 6" panels, smooth outer sides; riveted to posts.
- Casters: 5" dia., swivel, neoprene tires, 1-1/4 wide, load cap. 200 lbs. each, temp. range -20°/+160°F. Bearings are sealed and permanently lubricated. Two casters equipped with brakes.

PAN SLIDES:

- Extruded interlocking side wall panels act as pan slides on 1-1/2" centers.

SHORT FORM SPECIFICATIONS

Cres-Cor Utility Rack Model 252-1840. Extruded aluminum welded construction. Tie rods (2) applied at front and rear. Interlocking extruded sides for (39) 18" x 26" pans on 1-1/2" centers. 5" swivel neoprene casters, permanently lubricated, sealed ball bearings. Load capacity 200 lbs. each, temperature -20° to +160°F. Provide the following accessories: _____ . NSF listed. 2 year parts warranty.



5925 Heisley Road • Mentor, OH 44060-1833
 Phone: 877/CRESCOR • Fax: 440/350-7267
 www.crescor.com

© Crescent Metal Products, Inc. 1998 All rights reserved.

In line with its policy to continually improve its products, CRES-COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.