

ROAST-N-HOLD™ PROBE POWER UNIT WITH DIGITAL CONTROLS

FEATURES AND BENEFITS:

- Probe power unit constantly monitors and controls internal food temperature throughout the cooking and holding stages; delivers perfect results.
- Highly accurate food probe, linked to the easy to use and precise microprocessor digital controls, assure consistent quality.
- Use for rethermalizing of prepared meals or bulk items.
- Probe senses pre-set internal food temperature and automatically switches to holding mode until ready to serve.
- Power unit supplied with a 6" and 1-1/2" probe; adapts to your cooking needs.
- Option to operate without food probe in timer mode; all controlled by the microprocessor.
- Perfect Probe Cooking is this EASY:
 - 1) Preheat oven
 - 2) Place pans of food or roasts inside
 - 3) Set cook and hold temperatures
 - 4) Insert probe into food
 - 5) Push the Start Button

POWER UNIT OPTIONS FOR FULL SIZE OVENS

- 8200 Watts, 208 Volts, 1 Phase, 60 Hz.
- 8200 Watts, 240 Volts, 1 Phase, 60 Hz.
- 8200 Watts, 208 Volts, 3 Phase, 60 Hz.
- 8200 Watts, 240 Volts, 3 Phase, 60 Hz.

POWER UNIT OPTIONS FOR HALF SIZE OVENS

- 4700 Watts, 208 Volts, 1 Phase, 60 Hz.
- 4700 Watts, 240 Volts, 1 Phase, 60 Hz.
- 4700 Watts, 208 Volts, 3 Phase, 60 Hz.
- 4700 Watts, 240 Volts, 3 Phase, 60 Hz.

Also available for Cres Cor AquaTemp Series Ovens.



Probe Power Unit
(Humidity Option Shown)




For use with CO-151 and RO-151 Series Oven bodies. Specify probe power unit requirement when ordering.

ACCESSORIES and OPTIONS (Available at extra cost):

- Set of Preset Menu Item Switches
(Up to 10 presets allowed)
- Humidity Control

PROBE POWER UNIT

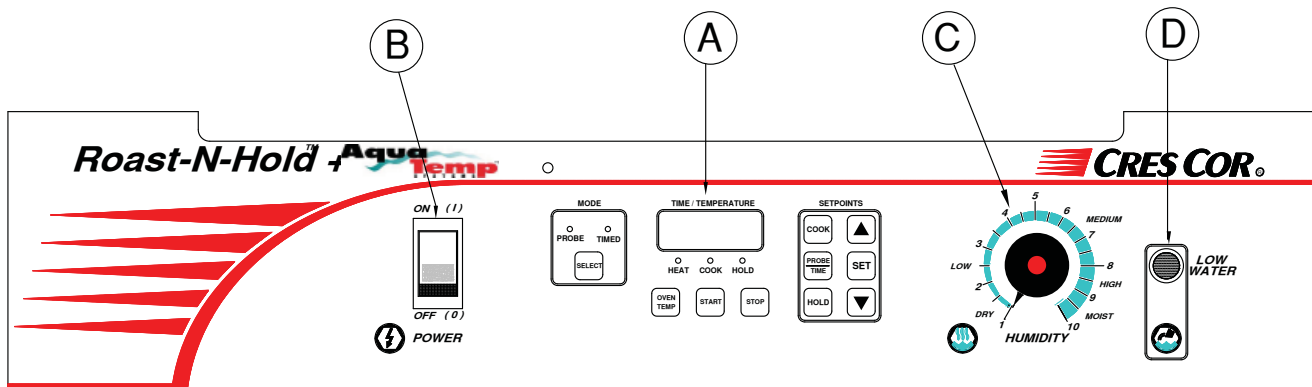

CONSTRUCTION:

- Body: Formed 20 ga. stainless steel.
- Front control panel: Black, recessed and tilted 7°.
- Assembly is fastened with screws and welded.

ELECTRICAL COMPONENTS:

- A) Microprocessor Control: Holds up to 200°F (93°C) and roasts up to 350°F (176.5°C)
- B) Switch: Rocker type for lighted ON/OFF.
- Power Cord: Permanent, 6 ft., 6/3 ga. with right angle plug.
- Fuses (2): 3 Amp.
- Blower Motors (3).
- Vent Fans (2).
- Food Probes (2): 1-1/2" and 6" long, stainless steel.

FOR UNITS ORDERED WITH HUMIDITY OPTION

- C) Humidity Control
- D) Low Water Light

POWER REQUIREMENTS AVAILABLE (for full size ovens):

- Heaters (3) 2670 Watts each.
- 8200 Watts, 208 Volts, 60 Hz., 1 phase, 39 Amps., 50 Amp. service.
- 8200 Watts, 240 Volts, 60 Hz., 1 phase, 34 Amps., 50 Amp. service.
- 8200 Watts, 208 Volts, 60 Hz., 3 phase, 23 Amps., 30 Amp. service.
- 8200 Watts, 240 Volts, 60 Hz., 3 phase, 20 Amps., 30 Amp. service.

POWER REQUIREMENTS AVAILABLE (for half size ovens):

- Heaters (3) 1470 Watts each.
- 4700 Watts, 208 Volts, 60 Hz., 1 phase, 24 Amps., 30 Amp. service.
- 4700 Watts, 240 Volts, 60 Hz., 1 phase, 20 Amps., 30 Amp. service.
- 4700 Watts, 208 Volts, 60 Hz., 3 phase, 13 Amps., 20 Amp. service.
- 4700 Watts, 240 Volts, 60 Hz., 3 phase, 12 Amps., 20 Amp. service.

NOTE: Wattage for unit with humidity option is 4950 watts

SHORT FORM SPECIFICATIONS

Cres Cor Probe Power Unit. 20 ga. stainless steel. Recessed black control panel; digital temperature display. Two stainless steel probes, 1-1/2" and 6" long. Use with CO-151 and RO-151 Series Ovens. _____ Watts, _____ Volts, 60 Hz., _____ Phase. 2 year parts warranty. Provide the following accessories: _____ .
CSA-US, CSA-C, CSA to NSF4 listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2008 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Litho in U.S.A.