

INSULATED STAINLESS STEEL RADIANT HOT CABINET MODEL 500HH1EE

FEATURES AND BENEFITS:

- Fully insulated cabinets keep prepared foods at serving temperatures.
- Powerful, yet efficient, 900 Watt heating system maintains the right temperature to properly hold products. Heats up to 220°F. (104°C.).
- Standard solid state electronic controls with large, clear, easy-to-read and operate LED digital display to ensure holding at precise food temperature.
- Internal frame in body maintains structural rigidity.
- Safety-conscious anti-microbial latches protect against spreading germs.
- Stainless steel construction throughout for ease of cleaning.
- Insulated field reversible doors for flexibility. Standard with right hand hinging; left hand hinging available upon request.
- Magnetic latches for “easy open”; twist-lock catch secures doors during transport. Latches and hinges mounted inboard.
- Wire pan supports are removable for easy cleaning and hold 12" x 20" pans on 1-3/8" centers.
- Heavy duty 3" swivel casters, two with brakes, that provide mobility when fully loaded.



500HH1EE




Standard solid state electronic controls with large, clear, easy-to-read and operate LED digital display to ensure holding at precise food temperature.

ACCESSORIES and OPTIONS (Available at extra cost):

- Key Lock Handles
- Corner Bumpers
- Perimeter Bumper
- Door Window
- Various Caster Options
- 240 Volt Service
- Various Interior Rack Options

500HH1EE

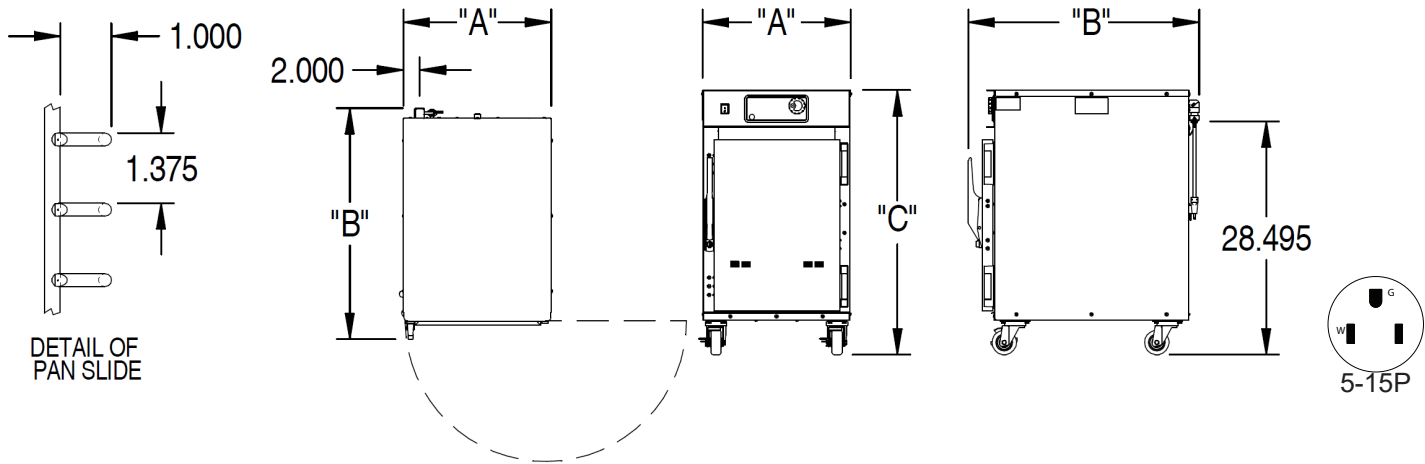

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
500HH1EE	5	12 x 20 x 2-1/2	IN	18-1/8	28-1/4	32-3/8	13-1/2	21-1/2	20	LBS	112
		305 x 510 x 65	MM	460	717	822	344	546	508	KG	51
	3	12 x 20 x 4	IN								
		305 x 510 x 105	MM								

When ordering bumpers, add 3-11/16 to DIM "A", 1-3/16 to DIM "B".

CABINETS:

- Bodies: 22 ga. outer and 20 ga. inner stainless steel compartments.
- Reinforcements: Internal framework of channels, 1 x 3/4 x .125.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 BTU/ft HR °F (.04 w/mK) at 75°F. 1-1/2" in top, bottom and walls, 1" in doors.

BASE:

- One piece construction, .060 stainless steel.
- Casters: 3" dia. swivel, 1-1/4" wide, load cap. 200 lbs. each, temp. range -45°/+180°F. Front casters equipped with brakes.

DOORS:

- Field reversible.
- Formed 20 ga. stainless steel.
- Latches: Chrome plated zinc with composite handle, magnetic type; mounted inboard.
- Transport knob.
- Hinges: Heavy duty chrome plated zinc; mounted inboard.
- Gaskets: Perimeter type, silicone.
- Vents: Adjustable.

PAN SLIDES:

- Wire rack with .312 dia. wire vertically and .250 dia. wire horizontally. Nickel chrome plated steel spaced on 1-3/8" centers.

HOT UNIT COMPONENTS:

- Thermostat: Solid state digital display control, room ambient to 220°F (104°C).
- Switches: ON-OFF rocker type.
- Solid-state relay.
- Power cord: Permanent, 6 ft., 14/3 ga. with right angle plug.
- Heaters (3): 300 Watts each.

POWER REQUIREMENTS:

- 900 Watts, 120 Volts, 60 Hz., single phase, 7.5 Amps., 15 Amp. service.

SHORT FORM SPECIFICATIONS

Cres Cor Insulated Hot Stainless Steel Cabinet Model 500HH1EE. Outer liner of 22 ga., stainless steel, inner liner of 20 ga. stainless steel, reinforced with channel frame. 1-1/2" Fiberglass insulation in walls, top and bottom; 1" in door. Welded and finished. (3) 300 Watt inner wall heaters, 120 volts. Removable pan supports for 12" x 20" pans spaced on 1-3/8" centers. 3" swivel casters. Load capacity 200 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: _____ CSA-US, CSA-C, CSA to NSF4 listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2026 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Made in America Since 1936